

NEG ARG FIBER

Continuous Roving

S-920 Roving



S-920 roving is single end roving developed for the production of textiles and scrims. It performs well during the weaving process, without the generation of fuzz or broken glass fiber filaments.

■ Product Number

AR320S-920/S ----- 320 tex
AR640S-920/S ----- 640 tex
AR1200S-920/S ----- 1200 tex
AR2400S-920/S ----- 2400 tex

■ Product Specifications

Type of glass ----- Alkali Resistant glass
Tensile strength (N/tex) ----- ≥ 0.245
Moisture content (%)* ----- ≤ 0.5

*Data measured by JIS (Japanese Industrial Standard)

■ Process

Weaving

■ Applications

Textile for Glassfiber Reinforced Concrete


■ Expected Effect

Smooth processability without fuzz

■ Packaging Data



Ball dimensions

- Inside diameter (d) ----- approx. 200 mm
- Outside diameter (D) --- approx. 275 mm
- Height (h) ----- approx. 270 mm
- Ball nominal weight ----- 12.0kg

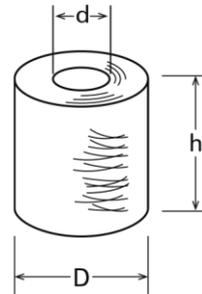

■ Palletizing Data

Number of packages / pallet	48
Number of layers	3
Number of packages / layer	16
Pallet dimensions (mm)	
Length (L)	1100
Width (W)	1100
Height (H)	970

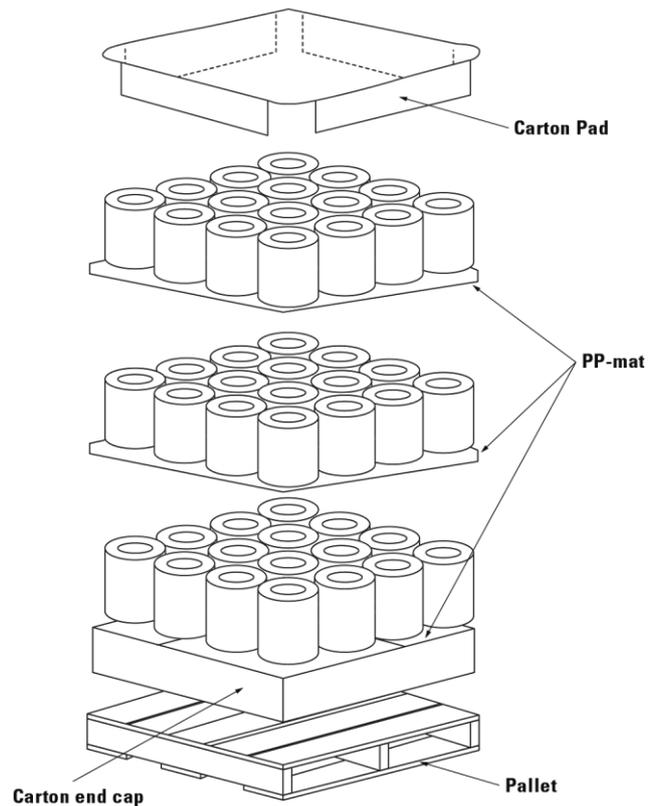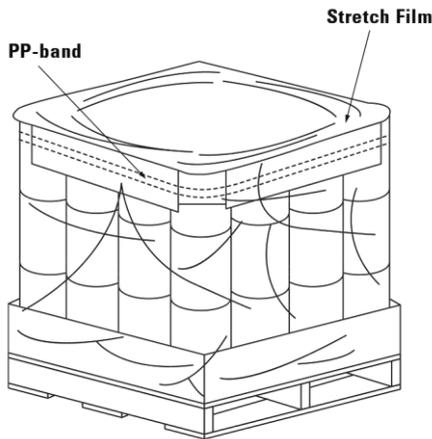

■ Storage Conditions

- S-920 Roving should be stored in an upright position in a dry area in its original packaging.
- S-920 Roving should be sheltered from the direct sunlight.